



Model CM-2 with cherry veneer


Common Features

- birch ply construction
- distortion free air cored inductors
- Mk-2 constrained layer damping applied to cabinet panels
- traditional quality veneers and finishing

CM-2 Mk-2 Features

- Advanced low distortion mid woofer driver with shorted turn technology, 220 mm diameter
- Upgraded Soft dome 25 mm hf unit, aluminium faceplate, 40 kHz bandwidth, soft rubber diffraction control

Common Impedance Curve

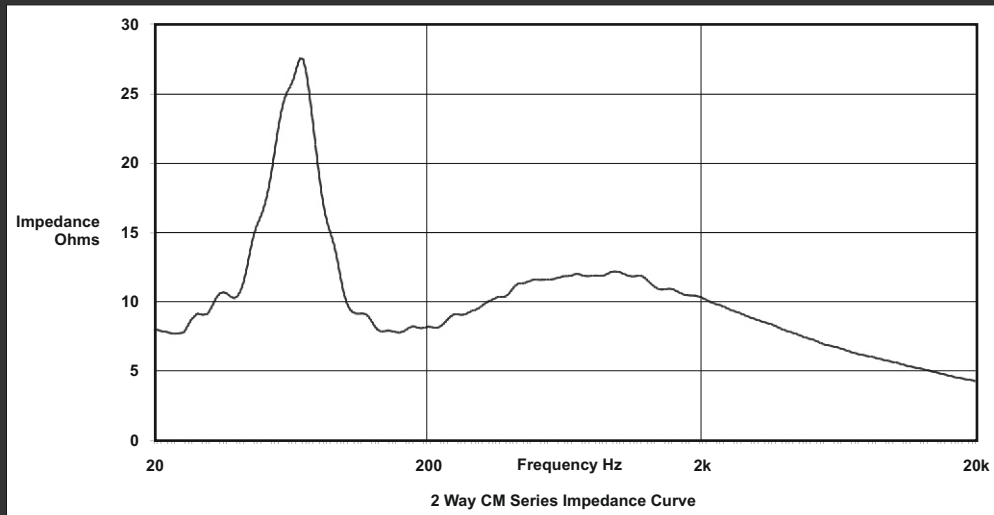


CM-2 Specifications


| | |
|------------------------------------|--|
| <i>Dimensions:</i> | 390 x 245 x 300 mm (height x width x length) |
| <i>Low Frequency Response:</i> | -6 dB at 60 Hz in room response with cabinet diffraction correction |
| <i>Sensitivity / Impedance:</i> | 90 dBA , 2.82 v input, nominal 6.5 ohm impedance |
| <i>Long Term Power Handling:</i> | 50 - 100 w rms recommended amplifier rating. (IEC 268-5) |
| <i>MC Intermodulation Rating :</i> | -46 dB / 0.5 % unweighted at 90dBA output level, 1 m measurement distance. |
| <i>Connectors:</i> | Screw terminal, combined banana, wire or spade input |
| <i>Stands:</i> | MC custom stands, or Atacama* SL 700 or |
| <i>Weight:</i> | 15 kg |

Overall rating, class B

Marshall Choong reserves the right to vary products and specifications without prior notice

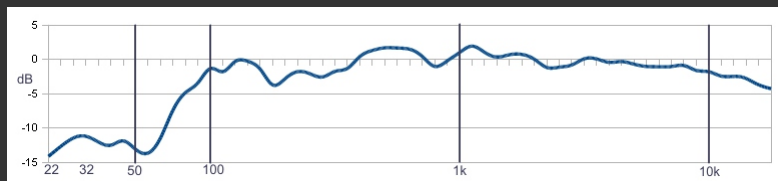

CM-2 6th octave room averaged

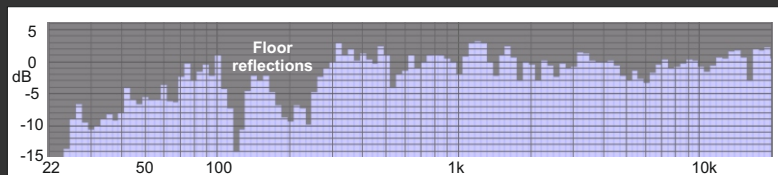

CM-2 12th octave semi anechoic